



### Aesthetically pleasing, decorative luminaire.

- 28 Watt 2D standard or 38 Watt 2D high power luminaire
- Fire-resistant polycarbonate luminaire body with opal diffuser
- Angled, banded, captive and deep captive trim options in a range of finishes
- Semi-recessing accessory for angled, banded and captive trim versions
- Deep captive version ingress rated to IP40
- Designed and manufactured to meet the requirements of BS EN 60598.2.22



28 W only




## Luminaire

Order Code	Input Voltage	Lamp Type	Power Cons. Mains/ Self-contained	Lamp Output Mains/ Self-contained	Operation / Duration (hrs)	Recharge Period	Environment	Weight
CLQ28NM	230 - 240 Vac, 50 Hz	28 W 2D	0.2 A / 0.25 A	1800 / 250 lumens	NM3	24 hours	0 - 25 °C	2.6 kg
CLQ28M	230 - 240 Vac, 50 Hz	28 W 2D	0.2 A / 0.25 A	1800 / 250 lumens	M3	24 hours	0 - 25 °C	3.2 kg
CLQ28PHF	230 - 240 Vac, 50 Hz	28 W 2D	0.2 A / -	1800 / 250 lumens	230 V	-	0 - 25 °C	2.1 kg
CLQ38NM	230 - 240 Vac, 50 Hz	38 W 2D	0.25 A / 0.23 A	2650 / 370 lumens	NM3	24 hours	0 - 25 °C	2.6 kg
CLQ38M	230 - 240 Vac, 50 Hz	38 W 2D	0.25 A / 0.23 A	2650 / 370 lumens	M3	24 hours	0 - 25 °C	3.2 kg
CLQ38PHF	230 - 240 Vac, 50 Hz	38 W 2D	0.25 A / -	2650 / 370 lumens	230 V	-	0 - 25 °C	2.1 kg

For AC/AC or AC/DC slave luminaires please refer to our EMEX Central Power Supply Systems Catalogue.

## Dimensions


Cable entry via 20 mm hole on rear of unit.

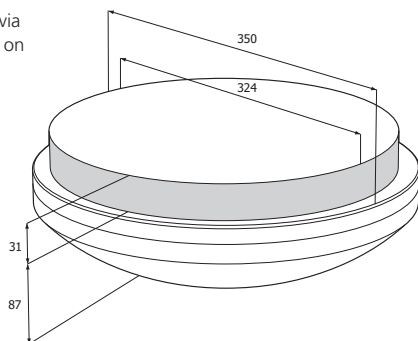

Ceiling cutout 330 mm when semi-recessing.


For Camarque spacing data, see page 82.

For further information on Central, IR2 and Self-Test emergency luminaire testing formats, see pages 70 - 74 or contact Emergi-Lite.

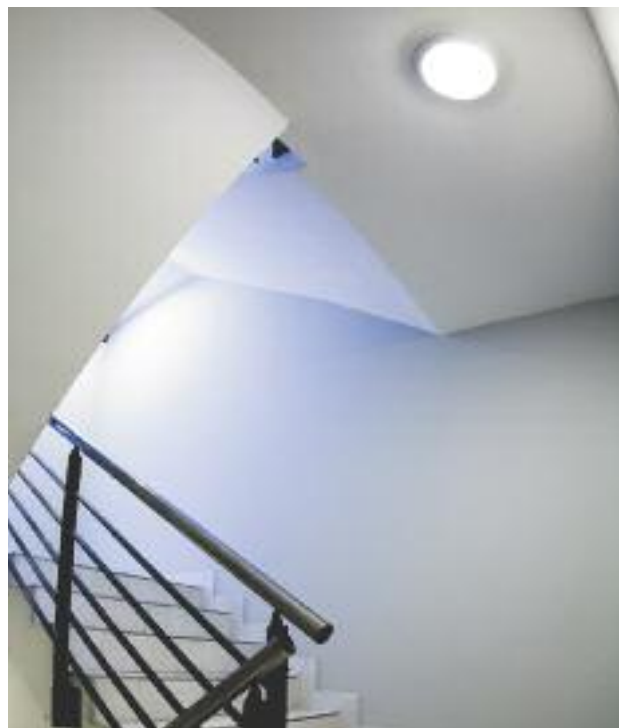

ELPC-0410


**Angled trim accessory**

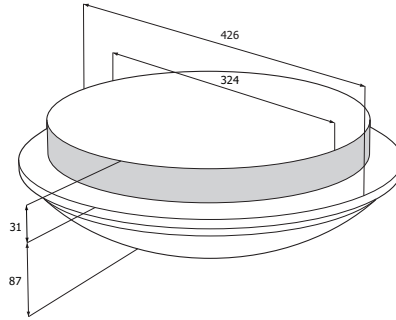

Order Code	Trim Colour
CLQ/GA	
CLQ/SA	
CLQ/WA	
CLQ/BKA	
CLQ/SR	Semi-recessing kit

Ceiling cutout 330 mm when semi-recessing.


**Banded trim accessory**

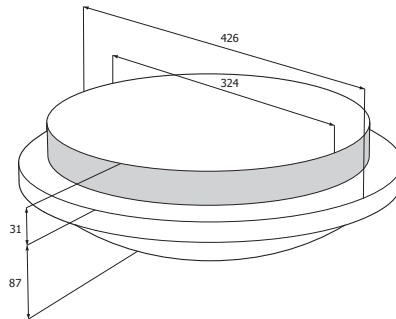

Order Code	Trim Colour
CLQ/GB	
CLQ/SB	
CLQ/WB	
CLQ/BKB	
CLQ/SR	Semi-recessing kit

Ceiling cutout 330 mm when semi-recessing.


**Captive trim accessory**

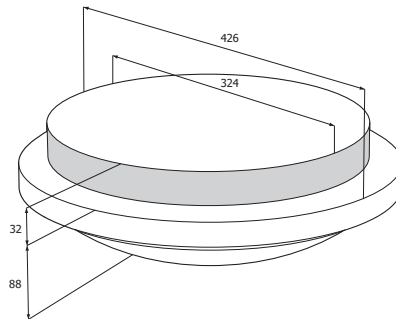

Order Code	Trim Colour
CLQ/GC	
CLQ/SC	
CLQ/WC	
CLQ/BKC	
CLQ/SR	Semi-recessing kit

Ceiling cutout 330 mm when semi-recessing.

**Deep captive trim accessory**

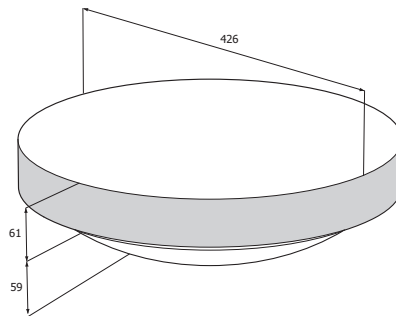

Order Code	Trim Colour
CLQ/GD	
CLQ/SD	
CLQ/WD	
CLQ/BKD	

ELPC-0410